



DESCRIPTION	ARM TYPE	MAXIMUM DOOR OPENING		RANGE OF HOLD OPEN
		WITH BUMPER	WITHOUT BUMPER	
REGULAR ARM	OT	120°	160° 	
HOLDER ARM	HT	120°	160° 	85° TO 120°

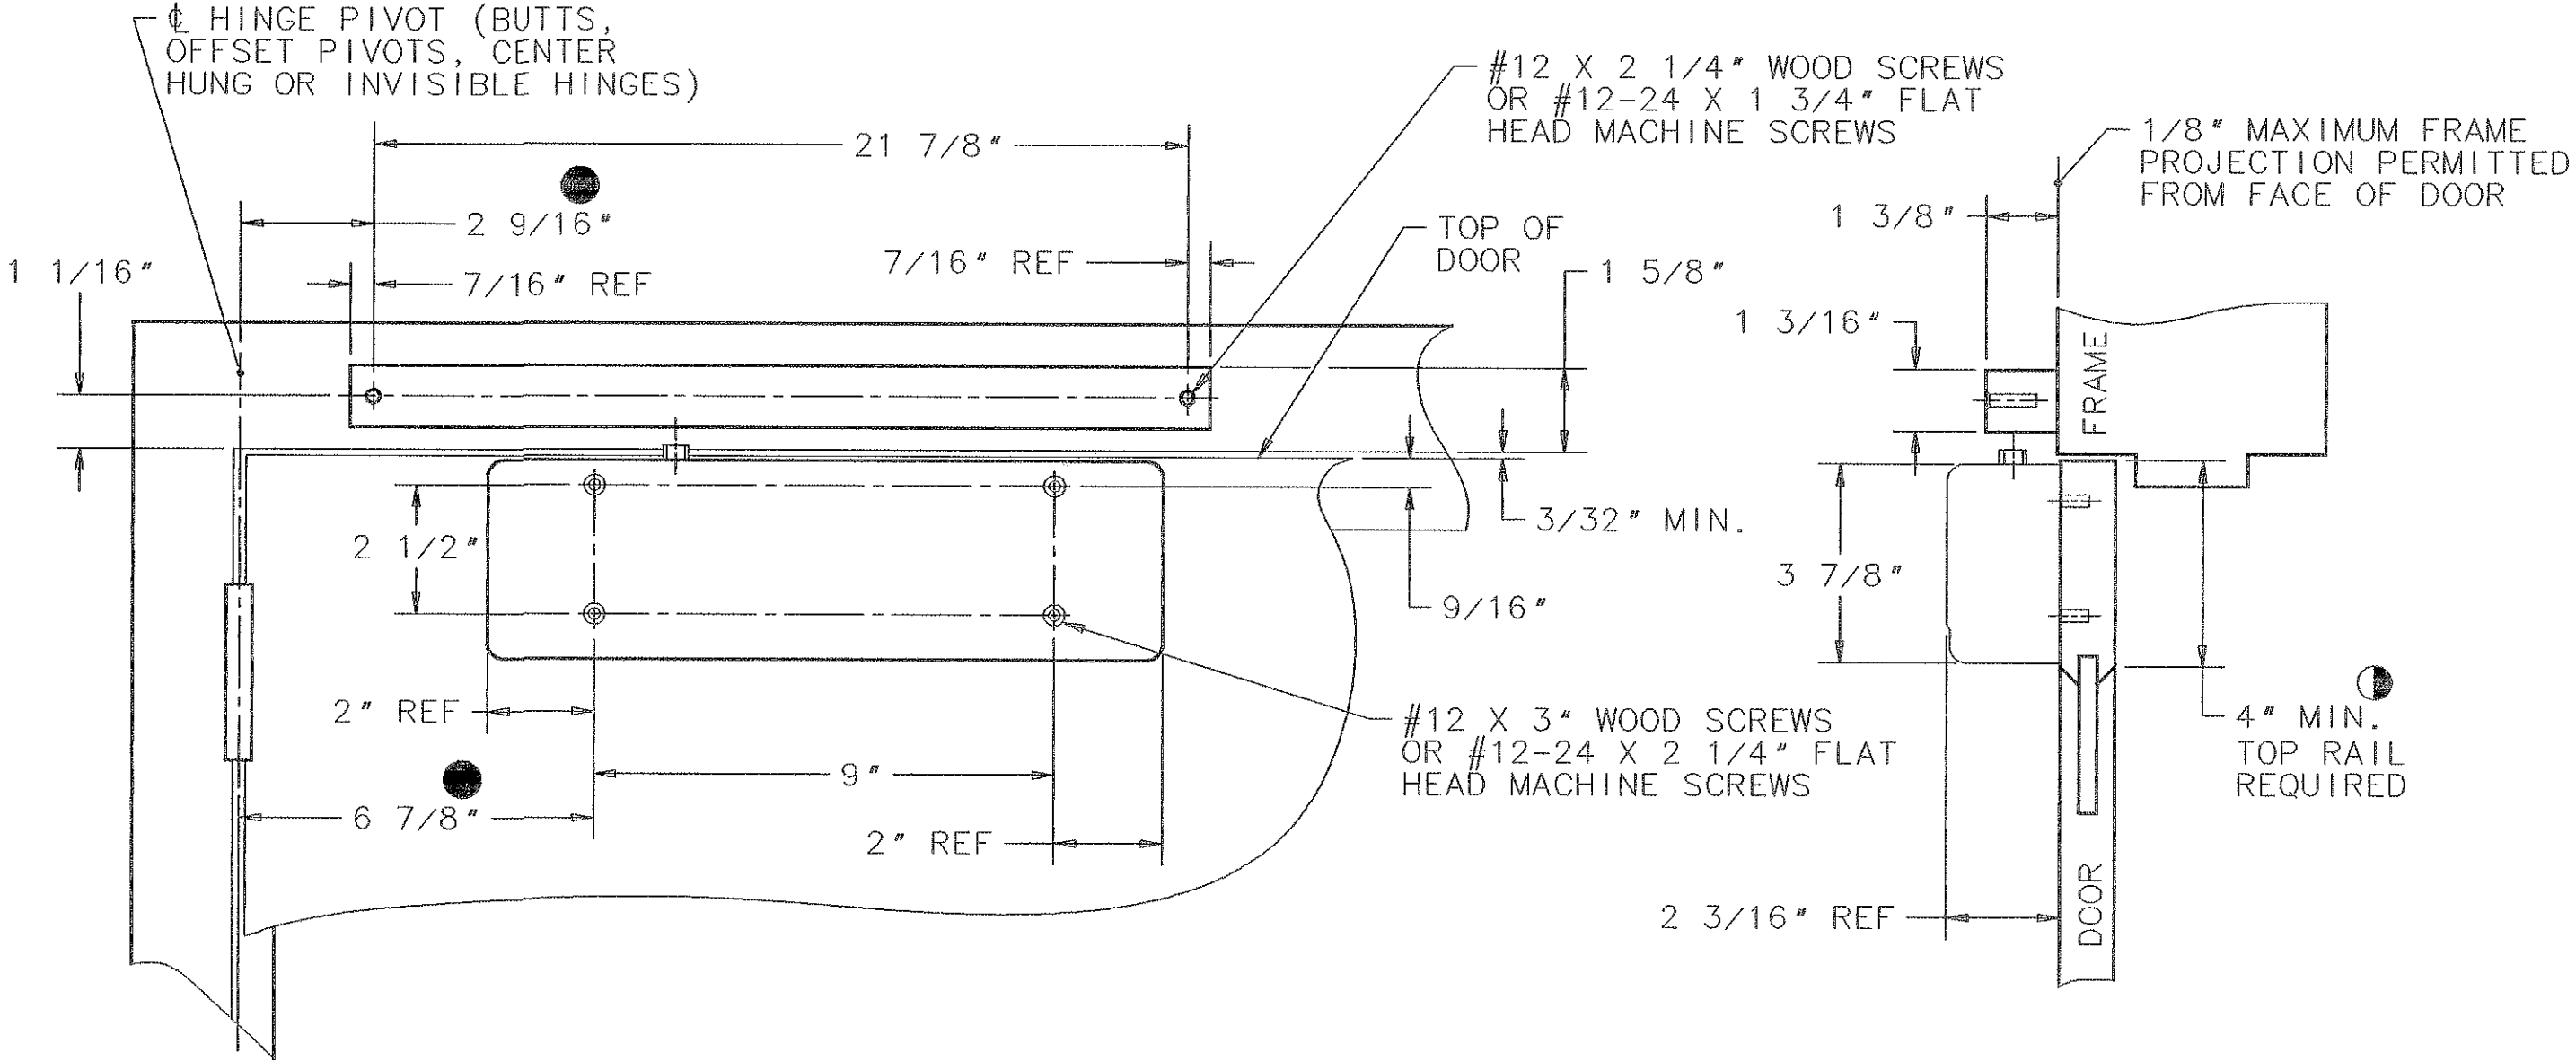

- ③

 THIS DIMENSION IS TAKEN FROM HINGE
EDGE OF DOOR FOR INVISIBLE HINGES.
- ②

RIGHT HAND DOOR SHOWN. LEFT
HAND DOOR OPPOSITE.
- ①

12 GAUGE MIN. REINFORCEMENT REQUIRED
FOR METAL DOORS AND FRAMES.
- ⑤

 351-A MOUNTING PLATE MAY BE
USED FOR DOOR WITH NARROW TOP RAIL.
- ④

 IF BUTT FRAME AND WALL CONDITIONS
PERMIT, CLOSER WILL ALLOW DOOR TO
OPEN 180°.

SARGENT MFG. COMPANY		NEW HAVEN, CONN. 06511	
DATA SHEET: 351 SERIES CLOSER TRACK TYPE APPLICATION (PULL SIDE MOUNTING) OT AND HT ARMS			EFFECTIVE DATE SEPT. 99
			TEMPLET NO. A6749 B