

Rockwood Half Height LP7901 Order Form

Experience a safer
and more open world

Complete this form and email to: orders.rockwood@assaabloy.com / or fax to: 800-922-9212


Customer Information

Company Name: _____ Date: _____


Account #: _____ Phone/Fax: _____ / _____

Email: _____ PO #: _____ Line #: _____

☐ Half Height Bolts Up (DBU) Qty: _____

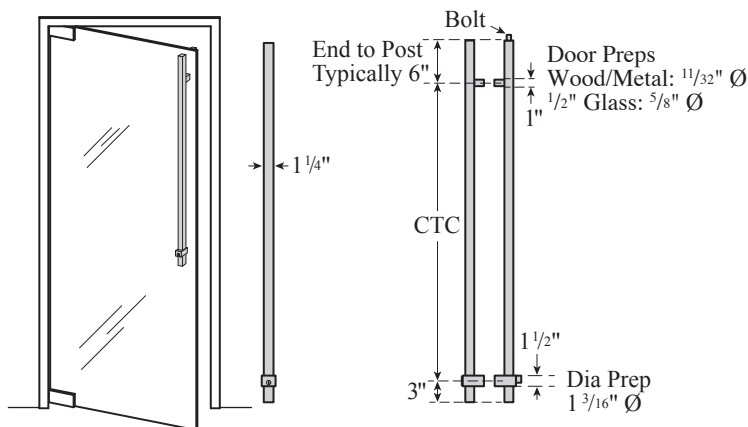

☐ Half Height Bolts Down (DBD) Qty: _____

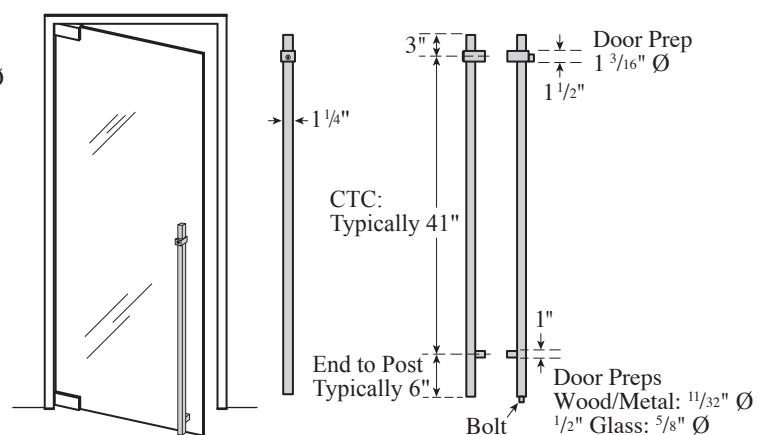

Note: Cylinder must be located 34"-48" above finished floor to meet ADA requirements. California ADA requires cylinder to be located 36"-46" above finished floor.

Finish (only stainless based and powder coats): _____

CTC (from 10" to 80"): _____

Bottom End to Post (from 3" to 12" in 1/16" increments): _____

Door Type: ☐ Glass ☐ Metal ☐ Wood

Door Thickness: _____

Hole Size (for glass door application only): _____

Cylinder Type: ☐ 01-Stock Yale ☐ 02-SFIC Housing (standard) ☐ 03-SFIC Housing w/PCC
☐ 05-Customer Sending to Rockwood ☐ 07-Dummy Cylinder ☐ 09-7 PIN SFIC HSG w/Yale Core

NOT TO SCALE